

Trusted Power Manufacturer since 1999

Consistent Quality, Factory-Direct Pricing, Built For Scale.

30M+

Units / Year

<1%

Defect Rate

12,000m²

Factory Area

450+

Employees

27 Yrs

Est. 1999



China HQ in Chongqing



Inhouse Copper Wire Production



Automation Manufacturing

WHY CHOOSE US



Ultra-Competitive Pricing

Vertical integration + scale + automation = cost advantage.



Scale & Consistent Quality

30M+ units/year on automated lines with unified quality control.



Complete Manufacturing Solution

From tooling to retail packaging.

DEPENDABLE QUALITY



Vertically Integrated

Inhouse copper wire drawing - lower cost & tighter QC.



OEM & Private Label

Your Brand & specs, or our proven models for fast market entry.



Certified & Warranted

Support certifications (CE, FCC, RoHS etc.) with 1-year warranty.

OUR CORE PRODUCTS



Data Cables



Wall Chargers



Car Chargers



Wireless Chargers



USB Adapters



contact@lianyu.tech



www.lianyu.tech

Your Trusted Power Manufacturing Partner

Since 1999, Lianyu Electronics has been delivering reliable, high-performance data cables, chargers, car chargers, and power accessories to customers worldwide. With advanced manufacturing capabilities, in-house copper wire production, and annual output of over 30 million units, we offer end-to-end OEM solutions with certified quality, competitive pricing, and flexible customization.



12,000 m²
Factory Area



450+
Employees



30 Million+
Units/Year




300+
Active SKUs



<1%
Defect Rate

Inside Lianyu - Where Quality is Built In


Explore our facilities showcasing every stage from raw-material processing to finished-product testing.

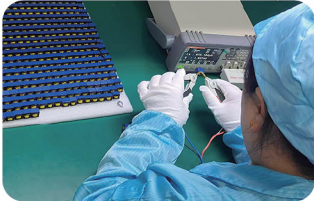

Incoming Quality Control (IQC) Inspection



Inhouse Copper Wire Production

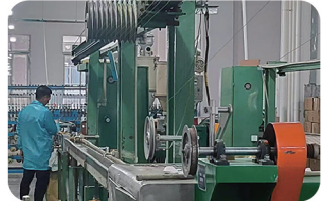

Wire and Cable Extrusion



High-speed Cable Braiding



Automated Wire-to-Connector Soldering




Automatic Injection Molding



Final Quality Control (FQC) Inspection



Bending / Flexing Test for Durability

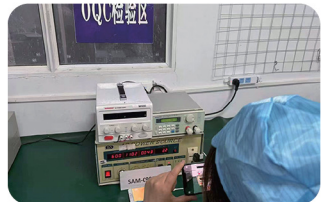

Outgoing Quality Control (OQC) Inspection

Certified Processes for Global Reliability

We operate under an ISO 9001:2015-certified management system, ensuring each process meets international standards. Product certifications such as CE, FCC, and RoHS are available upon client request.

- **Incoming checks** – Each batch inspected to ensure only qualified materials enter production.
- **Process control** – Ongoing inspections maintain consistent quality and performance.
- **Performance testing** – Electrical safety and efficiency verified through lab simulations.
- **Reliability tests** – Burn-in and stress checks confirm long-term stability.
- **Final inspection** – Appearance, labeling, and packaging verified before shipment.



60W/100W Fast Charging Type-C Data Cables

Ultra-durable. Blazing fast.
Boldly vibrant.



Type-C Data Cable 3A/60W L5062

- Premium, durable two-tone nylon jacket
- Optional clear PVC protective layer
- 10,000+ bends



Type-C Data Cable 5A/100W L6062

- Premium, durable two-tone nylon jacket
- E-Marker chip
- 10,000+ bends



Retractable Type-C Data Cable L4162

- Type-C to Type-C 3A/60W
- 3ft length
- Portable design




2-in-1 Phone Lanyard Data Cable L5162

- Type-C to Type-C 3A/60W
- Zinc alloy connector
- Braided cable




One Cable. Every Color.

Engineered for speed. Designed for style.

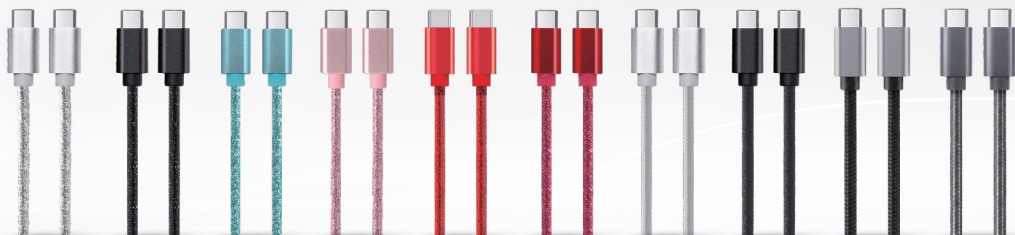

Metal-Shell Braided Data Cable Premium Silk-Like Fabric Braid

- L9032: C-C
- L7671: A-C
- L9481: A-L
- L7781: C-L
- L6671: A-Micro



Metal-Shell Sparkle Data Cable Stylish Glitter-Woven Jacket

- L9032: C-C
- L7671: A-C
- L9481: A-L
- L7781: C-L
- L6671: A-Micro



Metal-Shell Silicone Data Cable

Fine-Ribbed, Soft-Touch Silicone Cable


- L0352: A-C
- L1352: C-C
- L2352: A-L
- L3352: C-L
- L4352: A-Micro



Metal-Shell Silicone Data Cable

Ultra-Soft Silicone, Smooth Hand-Feel

- L0352: A-C
- L1352: C-C
- L2352: A-L
- L3352: C-L
- L4352: A-Micro



Metal-Shell Data Cable

With a Matching Braided Jacket

- L1471: A-C
- L06191: C-C
- L2151: A-L
- L1291: C-L
- L3151: A-Micro



Metal-Shell Braided Data Cable

Elastic Nylon Vertical-Rib Braid

- L0352: A-C
- L1352: C-C
- L2352: A-L
- L3352: C-L
- L4352: A-Micro



Braided PVC Data Cable

Flame-Retardant PVC + Nylon Braid

- L8071: A-C
- L3491: C-C
- L2702: A-L
- L9781: C-L
- L9071: A-Micro



PVC Data Cable

Flame-Retardant PVC Jacket

- L8071: A-C
- L3491: C-C
- L2702: A-L
- L9781: C-L
- L9071: A-Micro



Metal-Shell Rhinestone Data Cable
L3032

- Type-C to Type-C 3A/60W
- Iridescent multicolor rhinestone jacket
- Zinc alloy connectors



Metal-Shell Braided Data Cable
L9602

- Type-C to Type-C 3A/60W
- Aluminum shell
- Reflective metallic braid




Metal-Shell Braided Data Cable
L3312

- USB-A to Type-C
- Aluminum shell
- Chevron braid



Molded Real Silicone Data Cable
Ultra-Soft Silicone, Smooth Hand-Feel

- L0362: A-C
- L9262: C-C
- L8262: A-L

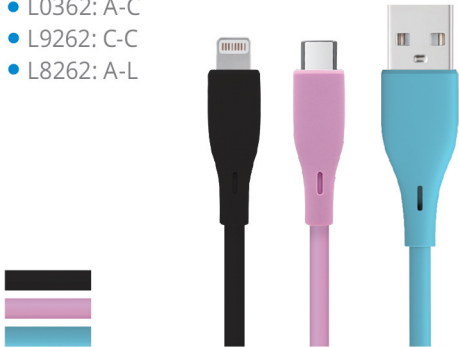

Molded Braided Data Cable
Chevron-Pattern Braid

- L4791: A-C
- L2691: C-C
- L0691: A-L
- L5291: C-L




Multicolor Iridescent Data Cable
Rainbow-Finish Metal Jacket

- L7671: A-C
- L8671: A-L



Metal-Shell Braided Data Cable L4991

- USB-A to Lightning
- Angular connector shell
- Reinforced flex



Metal-Shell Braided Data Cable L6202

- USB-A to Lightning
- Metal connector shells
- White fabric braid with black fishnet overlay



Metal-Shell Braided Data Cable L2491

- USB-A to Lightning
- Timeless, elegant design in space grey
- Tapered strain relief



Right-Angle Braided Data Cable L3691

- USB-A to Lightning
- 90° angled design
- Molded connectors



Wave-Printed Flat Data Cable L1702

- USB-A to Type-C
- Colorful wave print
- Flat cable design



Flat PVC Data Cable L2091


- USB-A to Type-C
- Flat flame-retardant PVC cable



Braided PVC Data Cable

L7791

- USB-A to Lightning
- Flame-retardant PVC
- Wave-pattern or single-color braided jacket

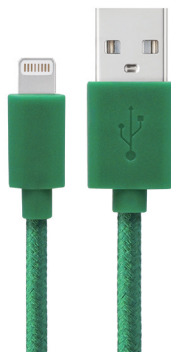

Metal-Shell Braided Data Cable

L76191

- Type-C to Lightning
- Sleek matte-black minimalist design
- Aluminum connectors



Zinc Alloy Flat-Braided Data Cable

L6362

- USB-C to Lightning
- Zinc-alloy connectors
- Flat braided cable jacket



Flat Molded PVC Data Cable

L1171

- USB-A to Lightning
- Flat cable design
- Flexible PVC jacket



Braided PVC Data Cable

L4071

- USB-A to Lightning
- Optional braided jacket
- Flexible, lightweight design



Molded Micro-USB Data Cable

L2031

- USB-A to Micro
- Flame-retardant PVC
- Ribbed strain relief



3-Port GaN PD Wall Charger 65W

T1062 (US Foldable / EU Plug)

- C1/C2: 65W | A: 18W
- Dual: C1+C2: 45+20W | C1+A: 45+18W | C2+A: 15W Shared
- 3-Port: 45+15W



GaN PD Wall Charger 45W

T0062 (US Foldable / EU Plug)

- Output: USB-C PD 45W Max
- Fixed PDO: 5/9/12/15V=3A | 20V=2.25A
- PPS: 3.3-11V=3A | 3.3-21V=2.25A



Dual-Port 1C1A Wall Charger 18W

T2032 (US / EU Plug)

- Single-port: C/A: 18W Max
- Output: 5V=3.6A Shared
- Dual-port: C+A: 18W Shared



Type-C PD Wall Charger 20W

T6012 (US / EU Plug)


- Single-port: C: 20W Max
- PD Output: 5V=3A | 9V=2.22A



Dual USB-C PD Wall Charger 18W

T8132 (US Plug)

- Single-port: C1/C2: 18W Max
- Output: 5V=3A | 9V=2A | 12V=1.5A
- Dual-port: C1+C2: 15W Shared

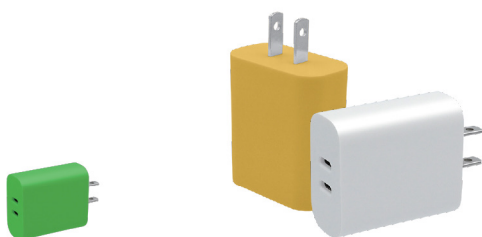

Type-C PD Wall Charger 20W

T0232 (US / EU Plug)

- Single-port: C: 20W Max
- PD Output: 5V=3A | 9V=2.22A
- Sparkle finish



USB-A Wall Charger 12W T5132 (US / EU Plug)

- Single-port: A: 12W Max
- Output: 5V $\Rightarrow$ 2.4A
- Sparkle finish



USB-A Wall Charger 10W T4031 (US Plug)

- Single-port: A: 10W Max
- Output: 5V $\Rightarrow$ 2.1A
- Lightweight



Dual USB-A Wall Charger 10.5W T2081 (US / EU Plug)

- Single-port: A1/A2: 10.5W Max
- Output: 5V $\Rightarrow$ 2.1A
- Dual-port: A1+A2: 10.5W Shared



Dual USB-A Wall Charger 12W T9132 (US / EU Plug)

- Single-port: A1/A2: 12W Max
- Output: 5V $\Rightarrow$ 2.4A
- Dual-port: A1+A2: 12W Shared



3-Port USB-A Wall Charger 12W T2091 (US Plug)

- Single-port: A1/A2/A3: 12W Max
- Output: 5V $\Rightarrow$ 2.4A
- Multi-port: A1+A2+A3: 12W Shared



4-Port USB-A Wall Charger 24W T1161 (US Foldable Plug)

- Single-port: A1/A2/A3/A4: 24W Max
- Output: 5V $\Rightarrow$ 4.8A
- Multi-port: A1+A2+A3+A4: 24W Shared



Dual USB-C PD Wall Charger 20W T5071 (US Plug)

- Single-port: C1/C2: 20W Max
- PD Output: 5V=3A | 9V=2.22A
- Dual-port: C1+C2: 20W Shared



USB-C Wall Charger 12W T3102 (US Plug)

- Single-port: C: 12W Max
- Output: 5V=2.4A
- Lightweight



Dual-Port Car Charger 15W C6902

- Input: 12-24V
- Single-port: C/A: 5V=3A, 15W Max
- Dual-Port: C+A: 15W Shared



Dual-Port Car Charger PD20W C9902

- Single-port: C: 20W Max | A: 15W Max
- PD Output: C: 5V=3A | 9V=2.22A | 12V=1.67A
- Dual-port: C+A: 15W Shared



Dual Port Car Charger PD20W C1012

- Single-port: C: 20W Max | A: 15W Max
- PD Output: C: 5V=3A | 9V=2.22A | 12V=1.67A
- Dual-port: C+A: 15W Shared



USB-C Car Charger PD20W C2022

- Input: 12-24V
- Single-port: C: 20W Max
- PD Output: 5V=3A | 9V=2.22A | 12V=1.67A



Dual USB-A Car Charger 12W C4061

- Input: 12-24V
- Single-port: A1/A2: 5V=2.4A, 12W Max
- Dual-Port: A1+A2: 12W Shared



3-Port USB-A Car Charger 15W C9091

- Input: 12-24V
- Output: A1/A2/A3: 5V=3.1A Shared
- Multi-port: A1+A2+A3: 15W Shared



Dual USB-A Car Charger 10.5W C5051

- Input: 12-24V
- Single-port: A1/A2: 5V=2.1A, 10.5W Max
- Dual-Port: A1+A2: 10.5W Shared



USB-C Car Charger 10.5W C2002

- Input: 12-24V
- Single-port: C: 5V=2.1A, 10.5W Max
- Finish: sleek metal-alloy



3-Port Car Charger PD35W C6081

- Single-port: C1/C2: 36W Max | A: 20W Max
- Output: C1/C2: 5/9/12V=3A | A: 5V=4A
- Multi-port: C1+C2: 15W Shared | C1/C2+A: 35+15W | C1+C2+A: 15+20W



USB-A Car Charger 10.5W C0341

- Input: 12-24V
- Single-port: A: 5V=2.1A, 10.5W Max
- Durable metallic shell



From Basic Adaptation to Full Customization

Three levels of service to match your requirements, timeline, and budget.



Quick Customization

- Rapid deployment using **pre-certified models**
- **Tailor specs** like power, color, logo, packaging
- Ideal for pilot launches & time-critical orders
- **Fast, efficient and market-ready**



Enhanced OEM

- **Precision manufacturing for your designs**
- Full alignment on technical specs & materials
- Ensure compliance and consistent quality
- **Guarantee international certification**



Full ODM

- From concept to commercial reality
- Include **concept design, 3D modeling, prototyping, testing, and certification**
- Deliver a complete, brand-ready product

USB Cable Customization



1. Length

Long: 3/6/10 ft or 1/1.2/2/3 m.
Short: 6in (15cm). Or other length.



2. USB Connector

USB C, USB A, Lightning, Micro USB,
USB Male/Female, pin layout.




3. Current & Protocol

Rated currents 1A-5A. PD fast-charge,
E-Marker, USB 2.0 / 3.0.



4. Connector Material

PVC/TPE injection, ABS/ Aluminium/ Zinc
alloy shell, nickel/gold-plated contacts.



5. Cable Details

Cable diameter, detailed wire
specification, shielding type, etc.



6. Cable Jacket

PVC, TPE, PU, nylon braid, fabric braid,
diamond, glitter, and more.



7. Branding & Packaging

Logo, label, packaging option (poly
bag/ blister card/ retail box/ gift kit).



8. Certification

CE, FCC, RoHS or based
on your specific requirements.

Charger Customization



1. Plug

Regional plug types:
US, EU, UK, AUS, and others.




2. Power & Ports

Common: 15W-160W, 1-4 ports. GaN,
Power distribution, Protocols.



3. USB Type

USB C, USB A, Micro USB,
and pin layout.

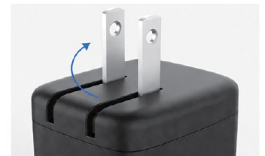

4. Connector Material

Wall charger/ desktop hub. Size. Foldable
or interchangeable plug. Light. LED.



5. Materials & Finishes

PC / ABS, Color, matte/gloss finish,
spray paint, metallic/fabric accents.



6. Wireless Charging

Single-coil, 2- or 3-in-1. Phone/
earbuds/watch. Power. Qi Protocol.



7. Branding & Packaging

Logo, label, packaging (cardboard box,
blister pack, PVC box, slider case, set).



8. Certification

We support certifications (CE, FCC, RoHS,
CB, etc.) based on your needs

Free Sample

At Lianyu Electronics, we are pleased to offer **free samples** to qualified wholesalers and for custom project assessments. Simply let us know your product interests or project requirements.

Packaging Options

Multiple Packaging Solutions to Meet Your Needs



Paper Box with Blister tray



Paper Box without Blister tray



PVC Box Packaging



Gift Box



Hanging Carded Blister Pack



Paper Suspension Card



Hanging Paperboard Window Box

Resealable ziplock pouch



Retail Display Stand
W:356MM D:115MM H:406MM



Retail Self-Service Box
Size: W:197 D:236 H:171MM





Ready to Start? Let's **Make It Simple.**

Free samples, tailored quotes and factory tours.
No commitment — just share your specs.

Request **Free Samples**

Scan WhatsApp or email us – reply within 48 hrs.



contact@lianyu.tech



www.lianyu.tech



[+852 6886 7684](https://wa.me/85268867684)

